

**INSTALLATION
INSTRUCTIONS**

**WEATHER
STOP**

For:
TILT UP - GARAGE DOORS
(Automatic or manual Garage Doors)

www.weatherstop.biz

FITTING INSTRUCTIONS - 15mm, 20mm, 25mm, 30mm, 40mm and 50mm High garage door threshold seals.

The threshold seals are suitable for use with manual and automatic tilt up garage doors.

The garage floor should be clean and free from dust, debris, oil and grease prior to fitting. For painted floors, a wire brush should be used to clean the area where the threshold seal is to be fitted to remove any loose paint.

Important: This product is not recommended for use on loose concrete or gravel surfaces. Unsealed concrete floors must be sealed prior to installation. (What is an unsealed floor? An unsealed floor is a floor with a loose or powdery finish)

Due to coiling in transport, the threshold seal should be laid flat on a clean surface so that it returns to its original shape.

Tools required:

- Tape measure
- Hacksaw / sharp utility knife
- Pencil or marker
- Straightedge or rule



The threshold seal should be fitted by a mature adult and due care and attention should be paid when stepping over the threshold seal.

Step One

Open the garage door and measure the overall width of the opening.

Allow an additional 40mm overhang each side so that the threshold seal can be notched back around the door frame.

Cut the threshold seal length to size.



Step Two

Position the threshold seal so that when the garage door closes the hump is behind the garage door.

With a pencil, mark where the threshold seal needs to be notched back. This will allow the seal to be positioned correctly behind the door and will create a tight seal around the frame.


Notch back the seal on both ends with a hacksaw or sharp scissors

Step Three

From the inside of the garage, (with the door closed), push the seal up to the pack of the garage door with the hump touching the door.

With a pencil, mark along the back edge of the seal.



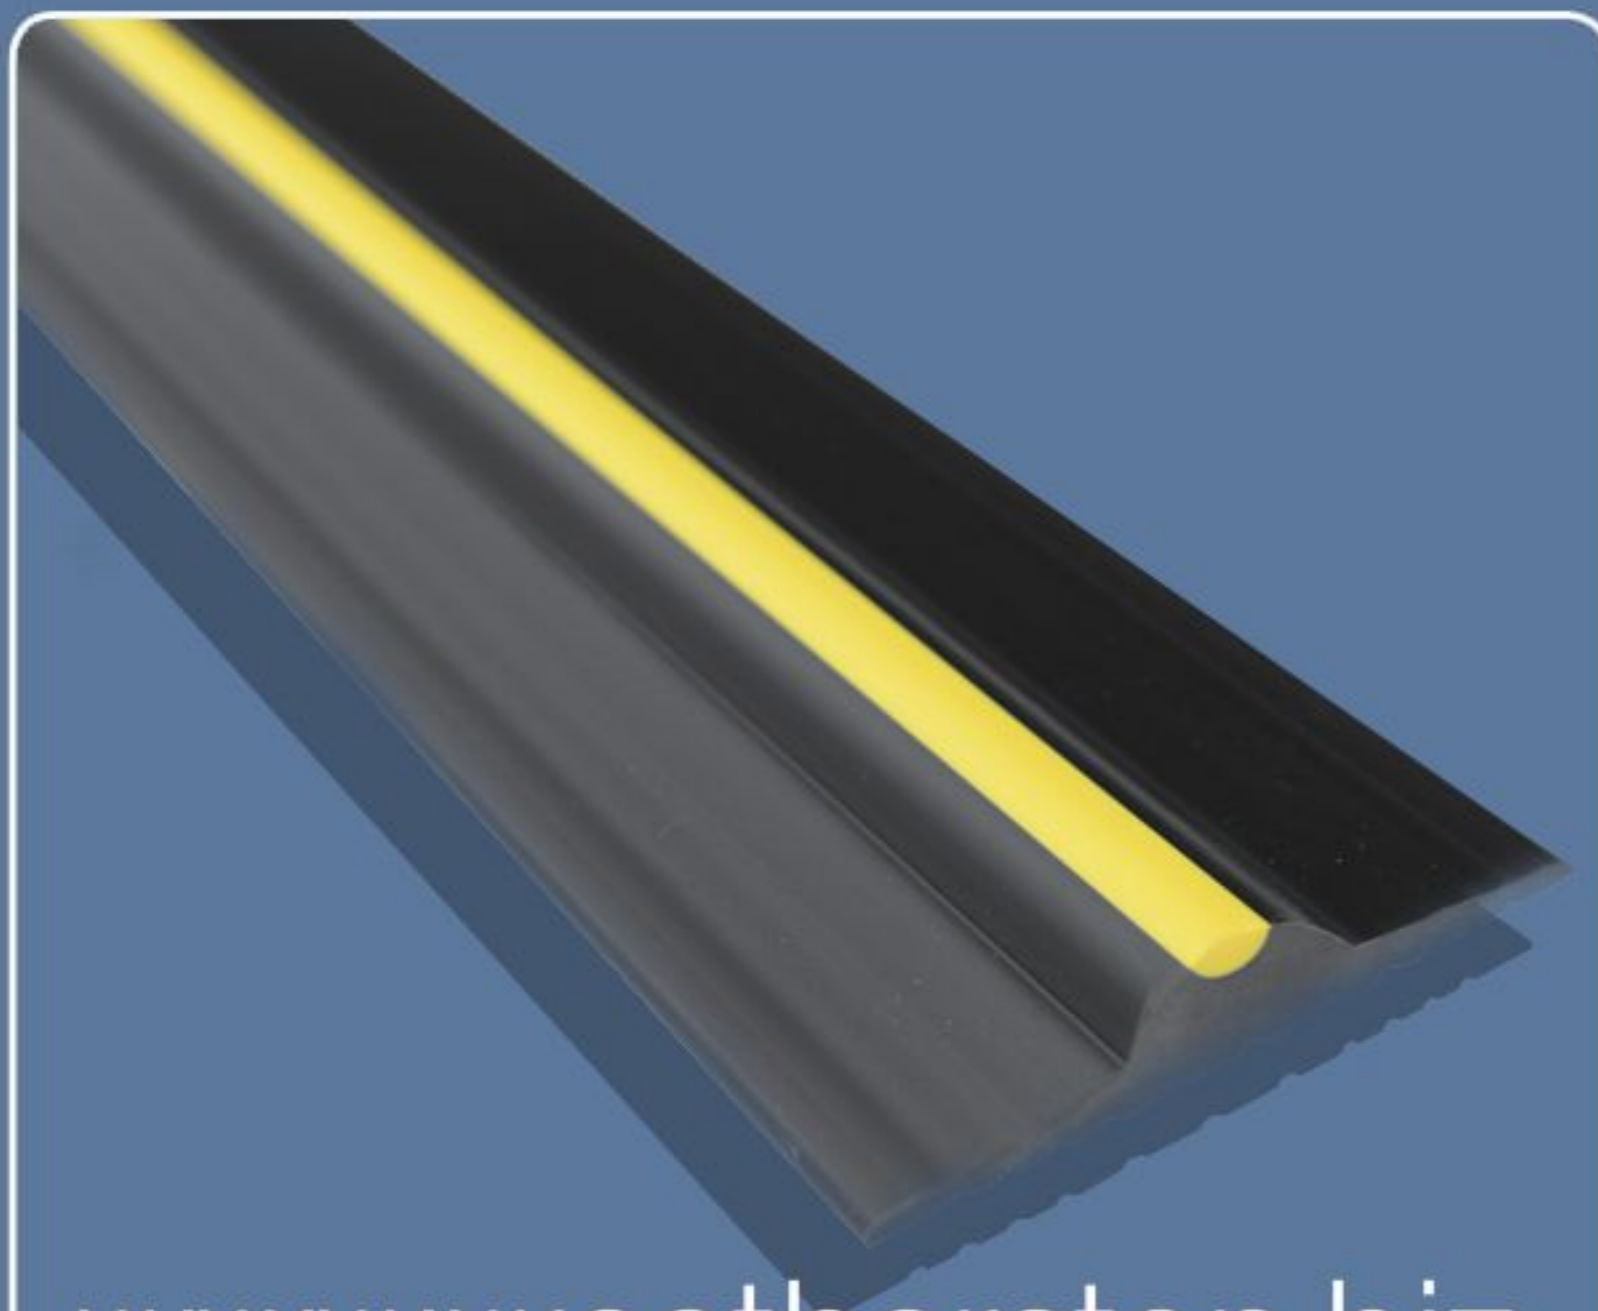

www.weatherstop.biz

Step Four

Open the door and mark a line along the front edge of the seal.

Remove the floor seal and mark two parallel lines approximately 10mm inside the existing lines.

Then mark a zigzag line in between the lines,



Step Five

Apply the adhesive provided to the floor following the zigzag pencil lines. Recommended application sealant temperature is +5°C to +35°C.

Please note. During colder weather it is recommended that you keep the adhesive at room temperature prior to fitting. This will make the adhesive easier to apply.

Step Six

Starting from one side, place the threshold seal on the adhesive, pressing down firmly. Continue along the rest of the seal, ensuring good contact at all points. Remove any excess adhesive from the sides of the seal with a clean cloth.

Allow 24 hours before driving over the threshold seal.

